


Delta Skew Issues

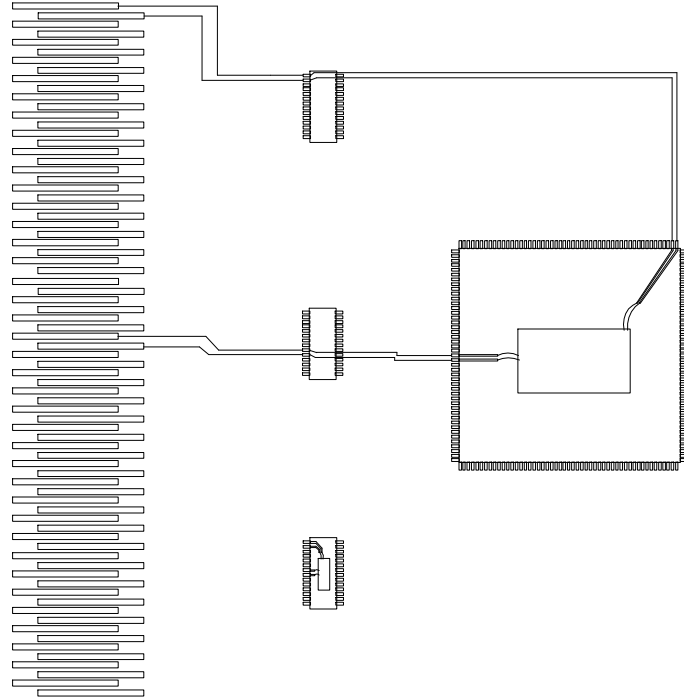

Unitrode Communications Marketing

LVDF Margin / Issues

- **Drive current**
 - 3.2 mA +/- 0.8 mA
 - Would like 3.5 mA +/- 0.5 mA
- **Receiver Threshold**
 - +/- 60 mV
 - Would like +/- 50 mV
- **Termination Failsafing**
 - Low Current 0.5 mA Maximum
 - 200 mV
- **Device Skew Delta**
 - 7-15 devices of the same type will have additive effects
 - Delta Etch length 1/2 inchs, includes packaging
 - Delta Capacitance 5 pF

Unitrode Communications Marketing