





TRANSLATE COMMAND PROPOSAL

- 1 - Provides a PHYSICAL POINTER FOR A GIVEN LBA
 - RESPONSE IS SAME FORMAT AS FORMAT AND READ DEFECT DATA (CYL, HD, SEC)
 - SUPPORTS MULTIPLE PHYSICAL SECTORS MAPPED TO A LOGICAL BLOCK
- 2 - Provides AN INVERSE TRANSLATION OF THE POINTER FROM # 1 ABOVE TO THE RELATED LOGICAL BLOCK(S).
- 3 - Requires 2 OP CODES FOR 12 BYTE COB'S
 - Requires NOT using LUN BYTE

LOGICAL → PHYSICAL

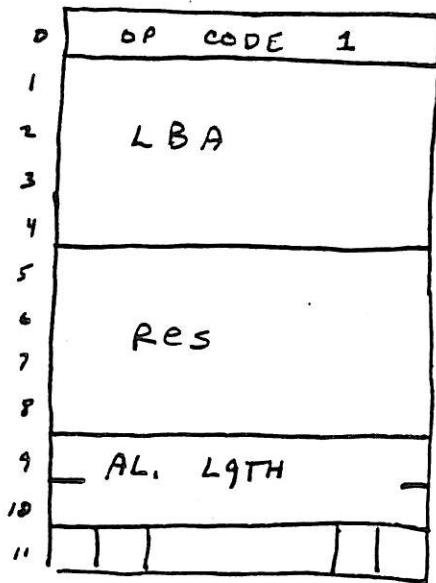

PHYSICAL → LOGICAL

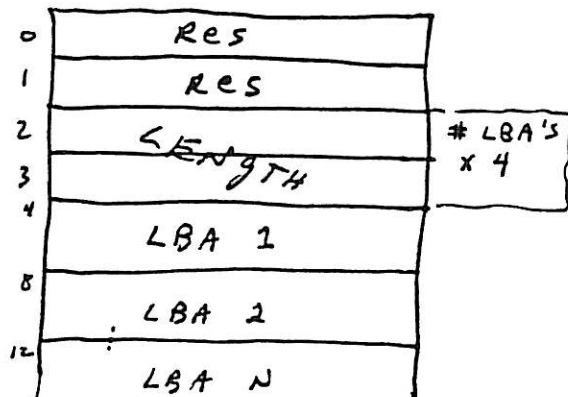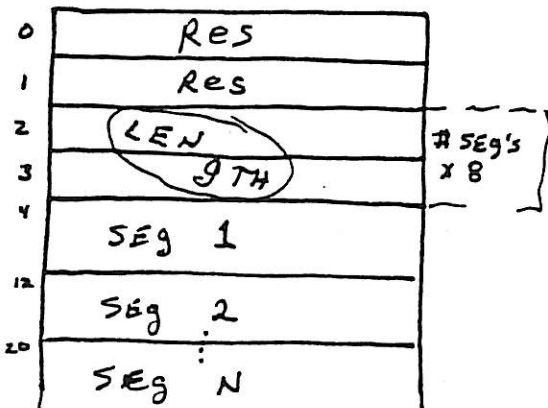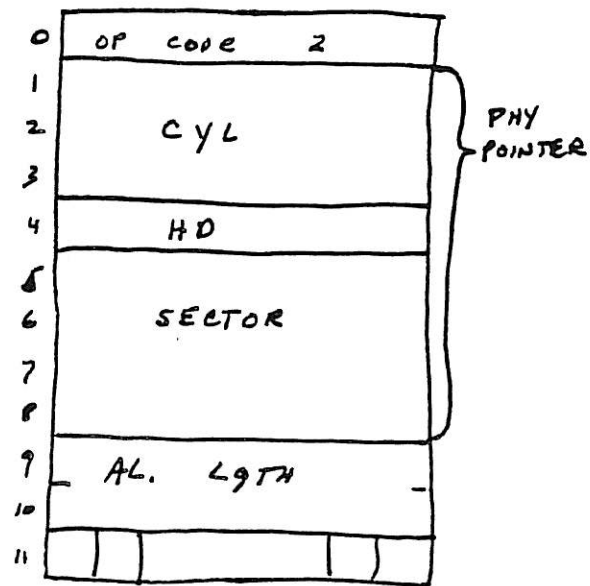

ERROR CONDITIONS:

1. NOT ABLE TO EXECUTE (HEADER NOT FOUND, ETC) = MEDIUM ERROR
2. ~~NOT~~ NO RELATED LBA (RESERVED AREA, SPACE, ETC) = ILLEGAL REQUEST