




SAS internal cable connector. Side ears tio be removed and a bump added at the thin section of the upper wall.



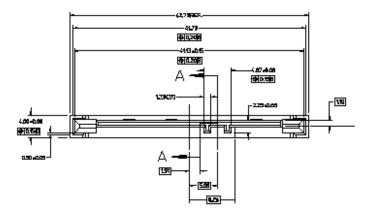

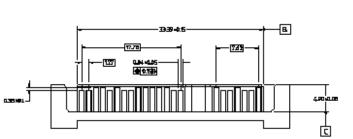

4.40-0.56

19.05

 \otimes

0.03-0.0

0.50.66.52 23*-

Plug connector.