


TO: T10 Membership
FROM: Paul A. Suhler, Seagate Removable Storage Solutions, LLC
DATE: 19 March 2003
SUBJECT: T10/03-140r0, ADI Figures

Revision 0:


- This is actually the third version of the figures.
- Revised Figures 2 and 3.
- Added new figure and text to illustrate bridging

ADC Figure 2 revised:

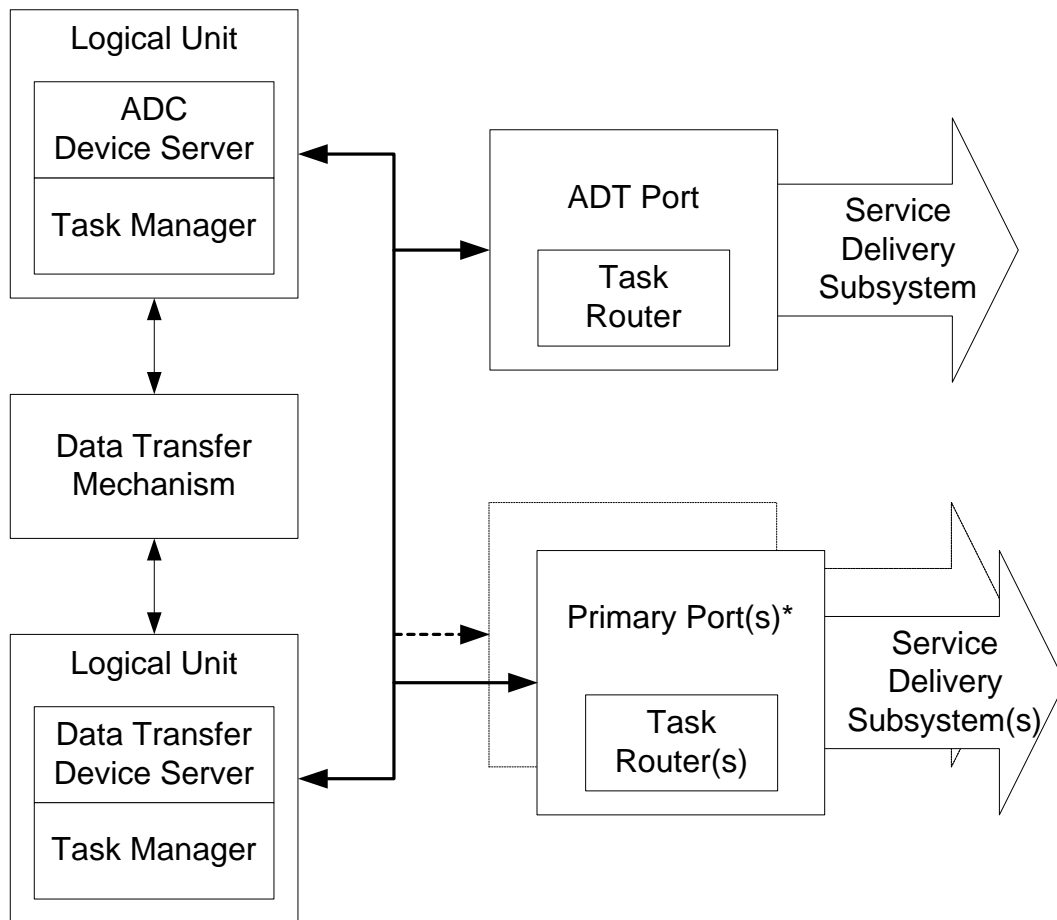

* Primary transport protocol ports are not necessarily SCSI ports.

ADC Figure 3 revised:

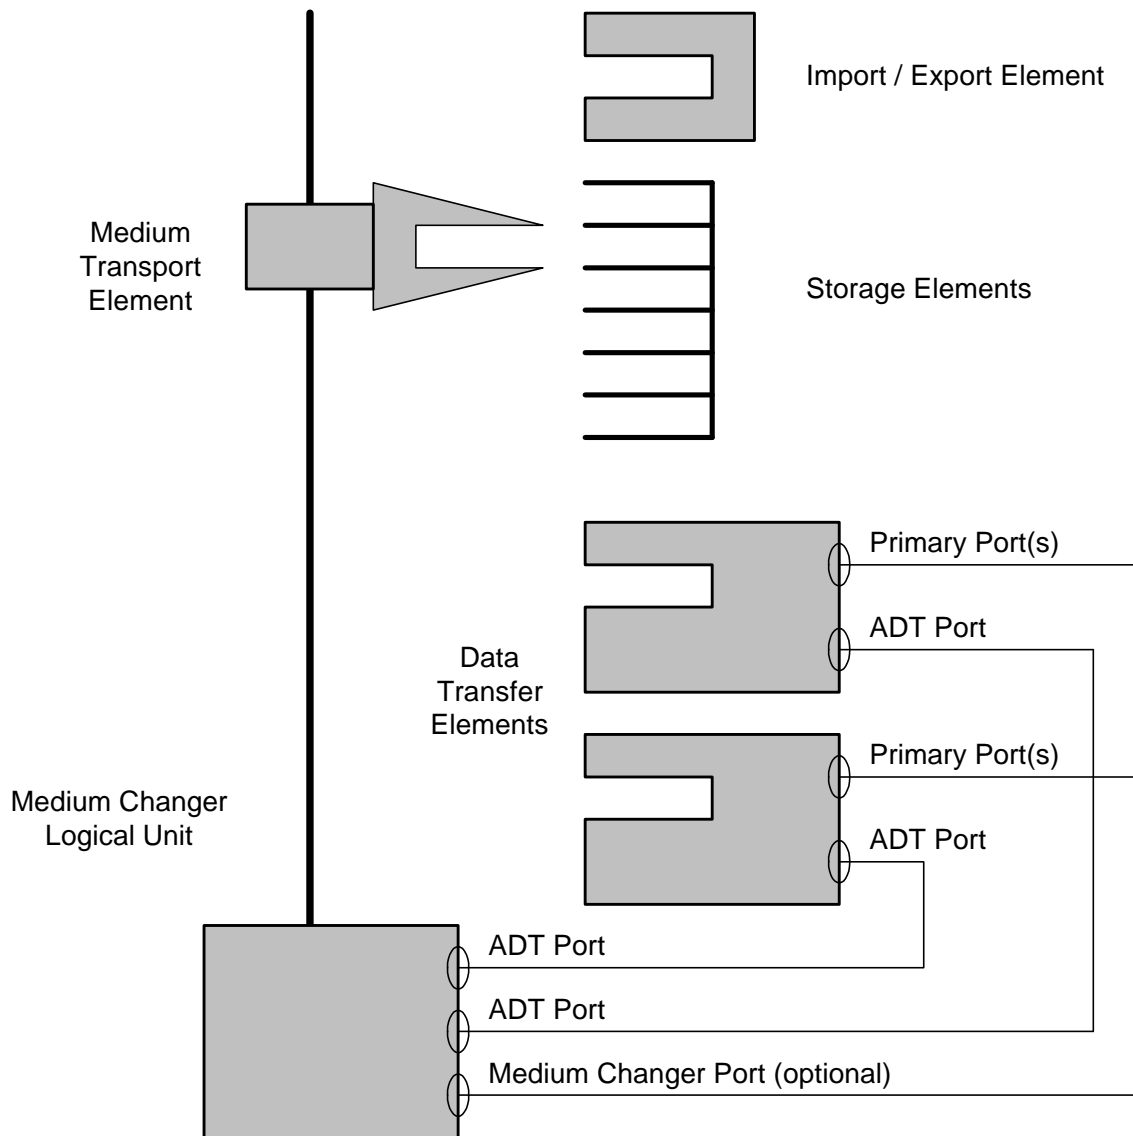

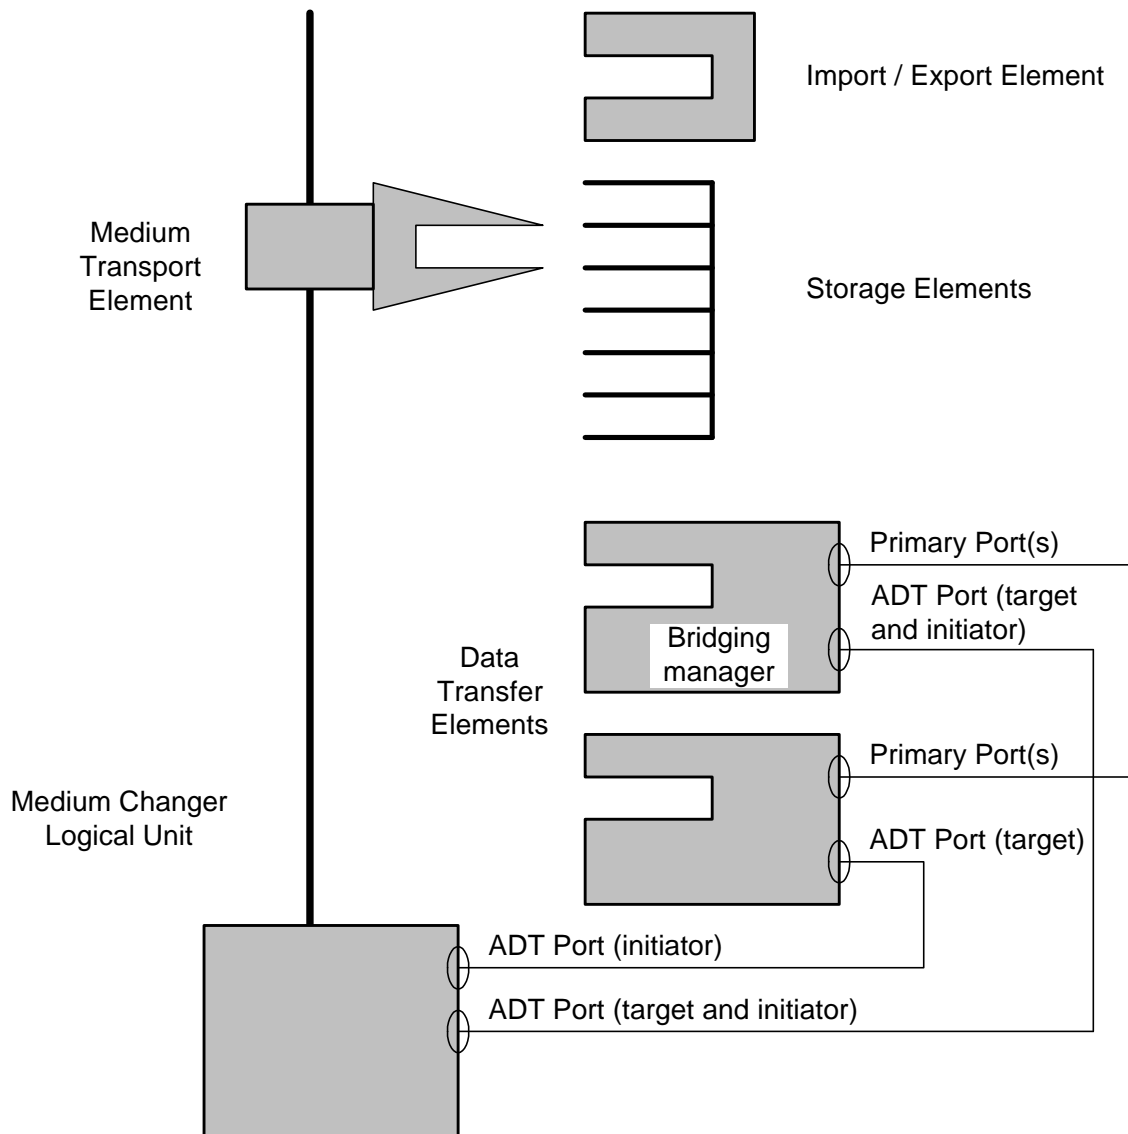
New figure:

Figure x – Automation and data transfer device relationship for bridging

Figure x shows a system in which the medium changer has only ADT ports and one of the data transfer devices is performing bridging. The upper data transfer device contains an active bridging manager and its ADT port is operating both in initiator mode (to issue commands to the medium changer) and in target mode (to receive commands initiated by the medium changer). The corresponding ADT port on the medium changer also operates in both modes.

The lower data transfer device is not performing bridging and its ADT port only operates in target mode. The corresponding ADT port on the medium changer only operates in initiator mode.

Editor's Note: Should this figure also be included in ADT?
