


Date: 5/9/97

On May 8, 1997, T10 voted to revise Figure 24 in SPI-2 as shown below to add the "SHALL BE DETECTED" and "MAY BE DETECTED" text.

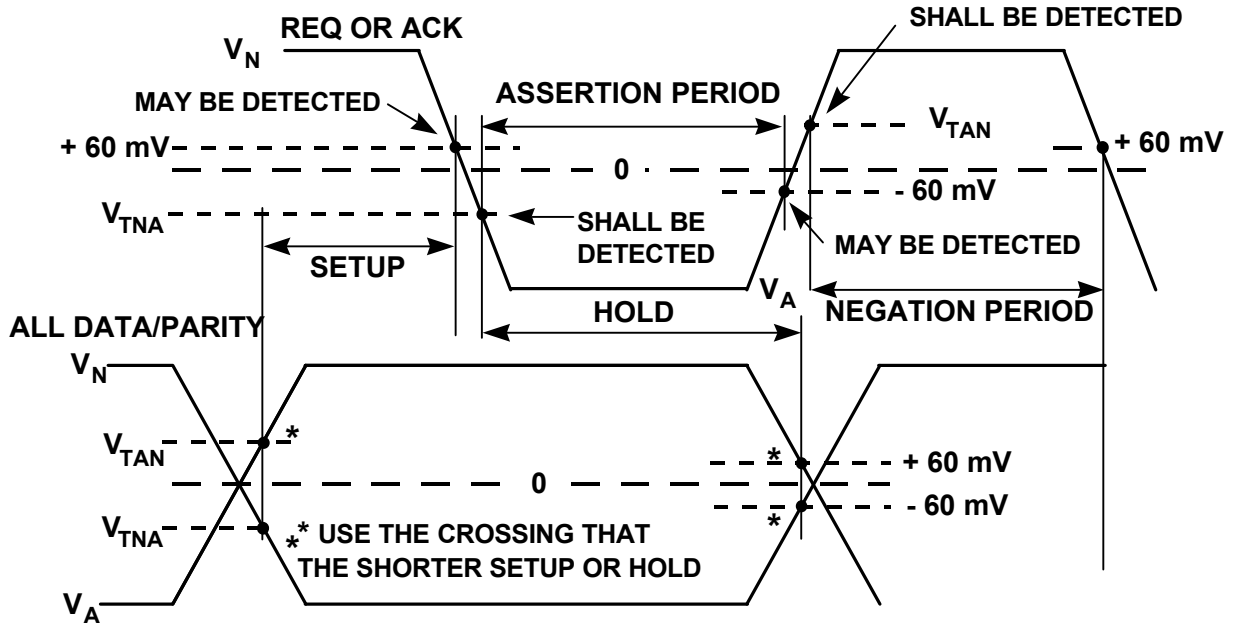

$$V_{TNA} = - \max [60 \text{ mV}, 0.25 * V_N]$$

$$V_{TAN} = \max [60 \text{ mV}, -0.25 * V_A]$$

$$1.0 \text{ V} \geq V_N \geq 60 \text{ mV}$$

$$-1.0 \text{ V} \leq V_A \leq -60 \text{ mV}$$

DIFFERENTIAL VOLTAGE SIGNALS IN ALL CASES