

# STEWART STAMPING CORPORATION

---

Insilco

NCR  
3718 N. Rock Rd.  
Wichita, Ka. 67226

Attn: John Lohmeyer     Chairman X3T9.2 Committee

Dear John,

Enclosed are the overheads used in our presentation at the Boston plenary meeting.

If you could send me the copies of the presentation on transmission characteristics of the .025 spaced cable given by AMP at the same session I would be most appreciative.

Will look forward to seeing you in San Diego in Dec.

Best personal regards,



David A. Hatch  
Manager of Advanced Product  
Development and Engineering

## DAISY CHAINING:



AN INTERCONNECTION TECHNIQUE,  
USUALLY FEATURING FLAT RIBBON CABLE,  
WHERE ONE OR MORE CONNECTORS ARE  
TERMINATED ALONG THE LENGTH OF THE  
CABLE. CABLE CONDUCTORS REMAIN  
INTACT AND ARE NOT CUT TO FACILITATE  
MID-CABLE TERMINATION.



## DAISY-GEN


DAISY CHAINABLE 50 & 68  
CONTACT INTERNAL I/O  
CONNECTOR.

FEATURING THE AT&T CENTER PIERCING  
CONTACT IN A TYPICAL IDC CONNECTOR  
FORMAT


TERMINATES 2 LAYERS OF .050 INCH  
CENTERED "STANDARD" RIBBON CABLE  
INCLUDING "TWIST AND FLAT ®" STYLES.

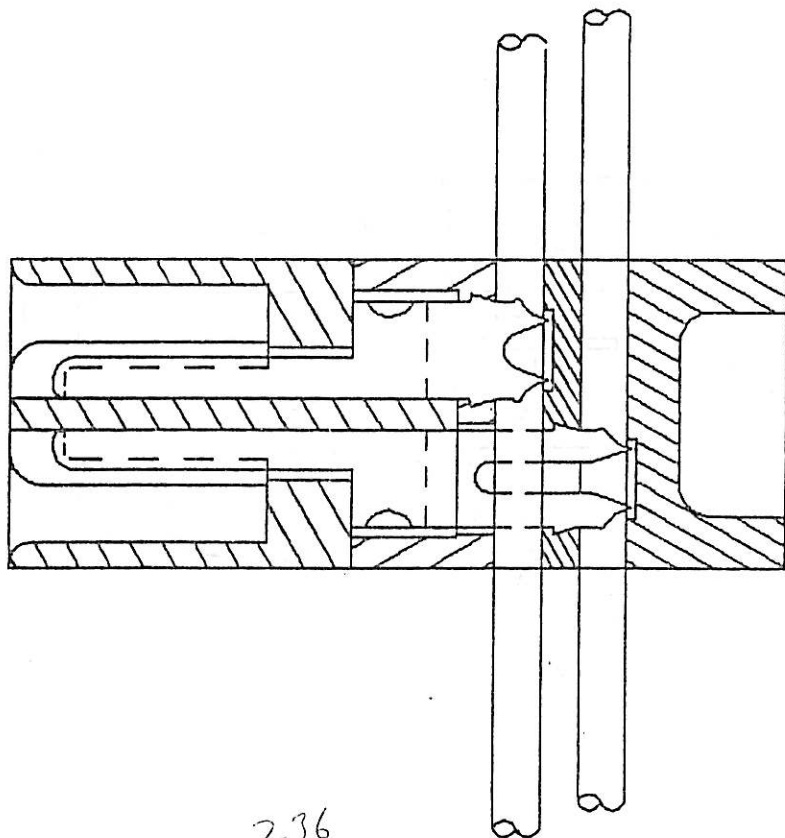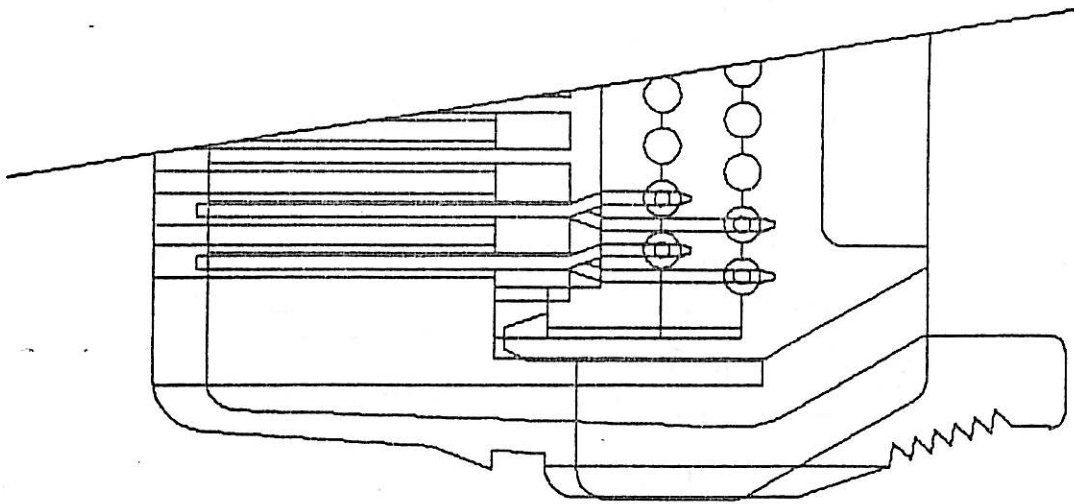

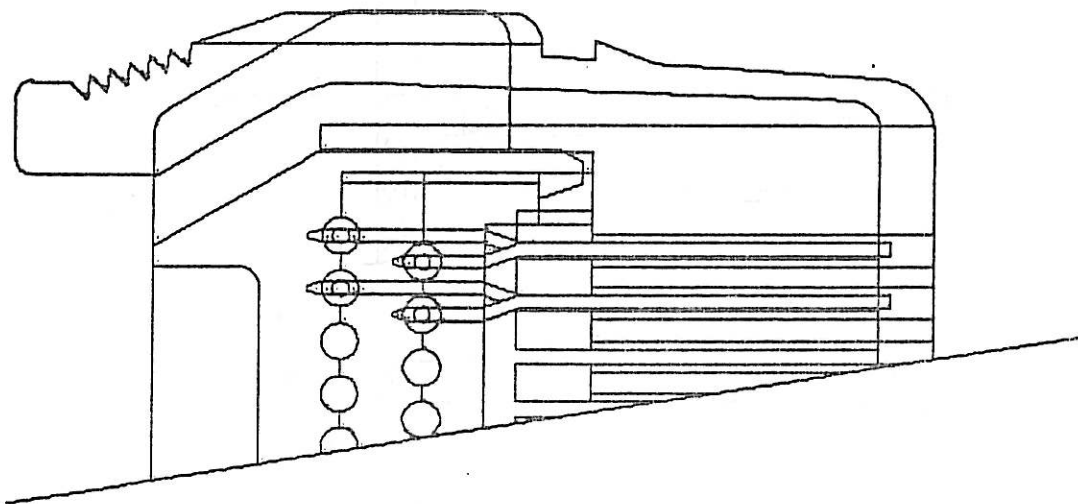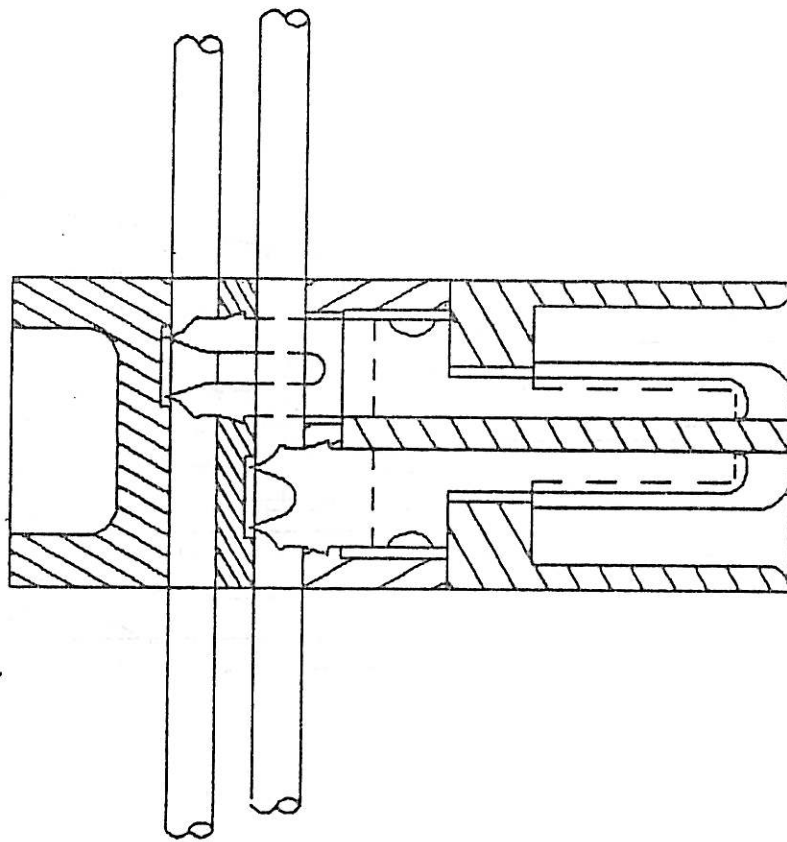





MODULAR  
PLUG  
CONTACT


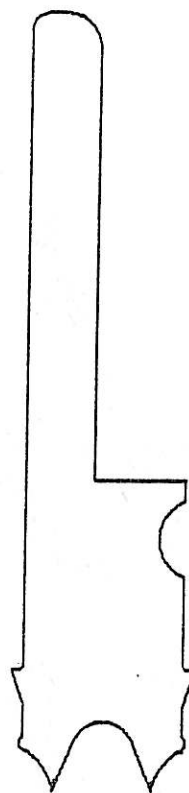


DAISY-GEN  
CONTACT

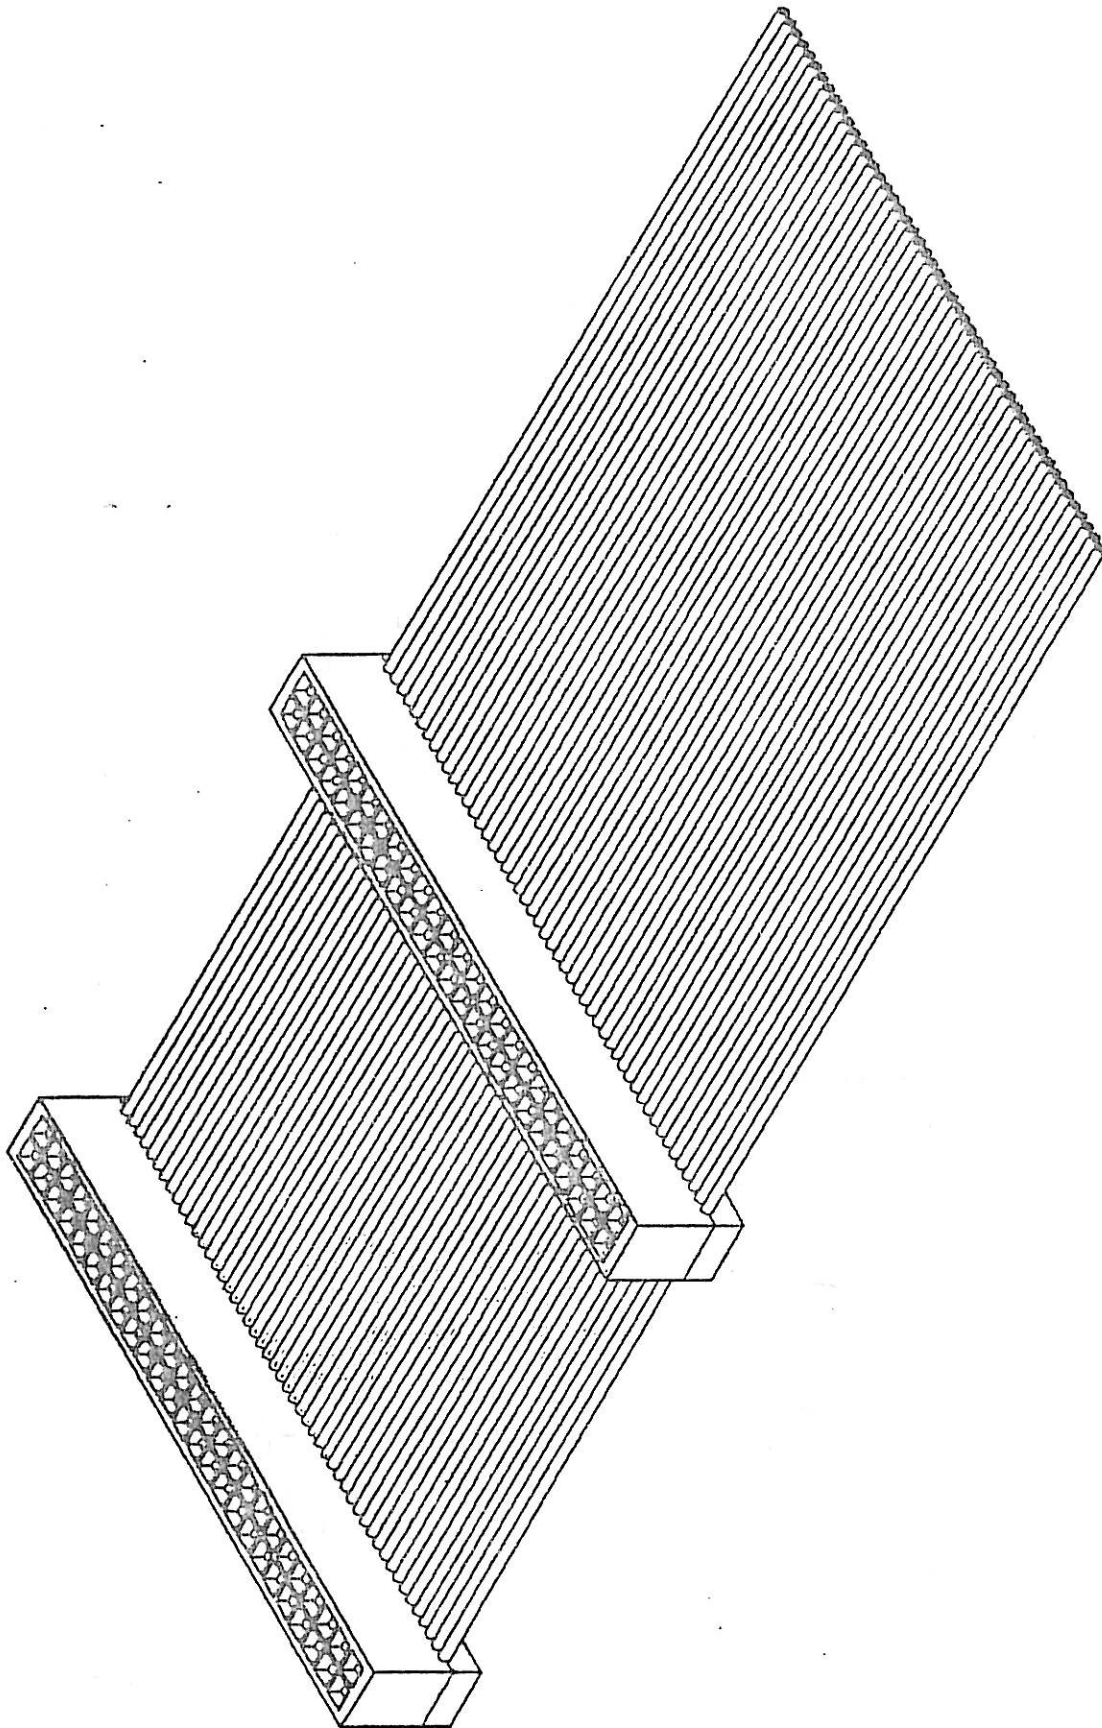


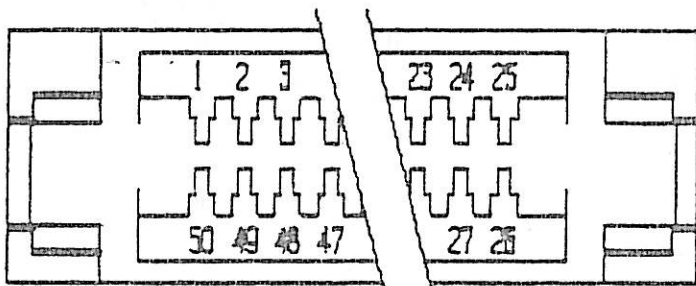

DAISY-GEN




T & R

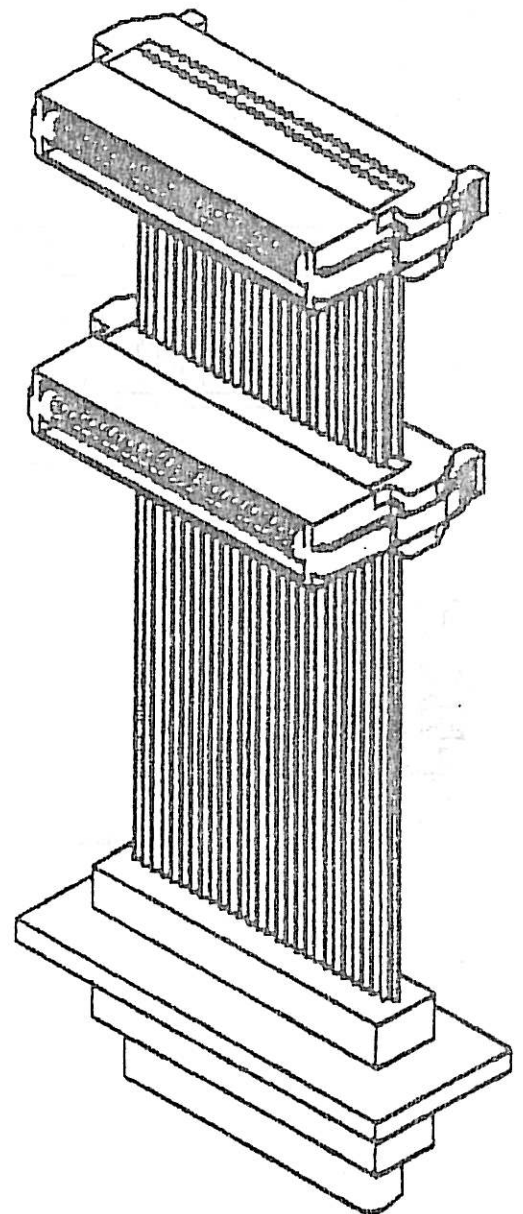


INTERCABLING DAISY-GEN / T & R





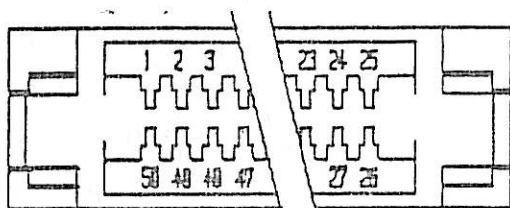


DAISY-GEN





LOW DENSITY SCSI-1

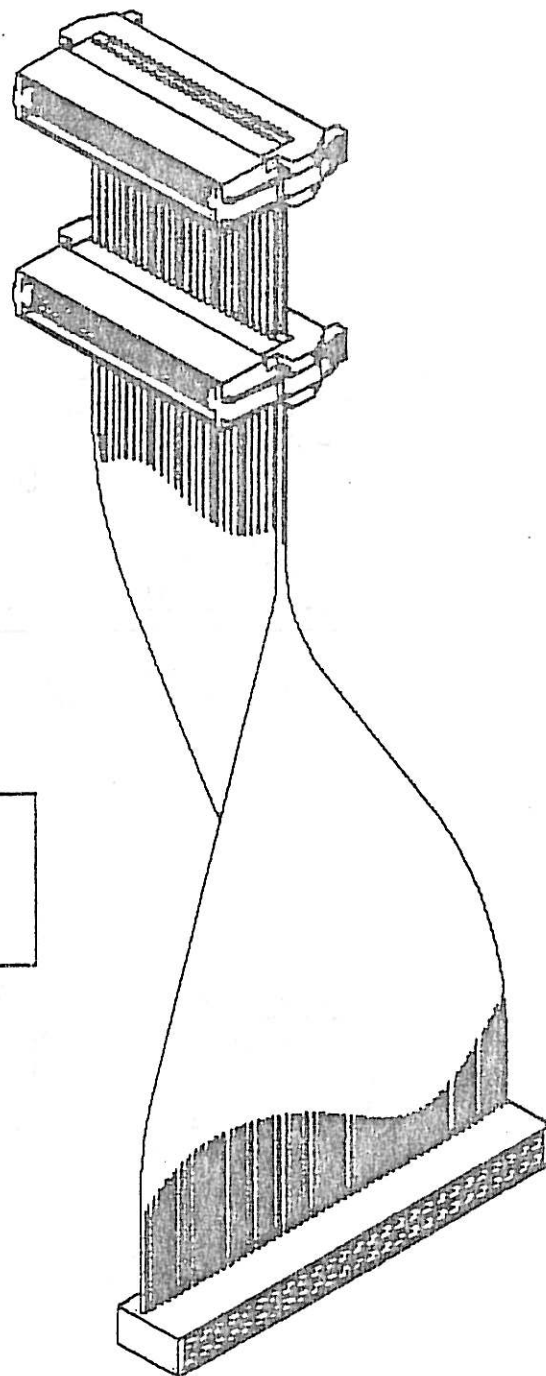




INTERCABLING DAISY-GEN / SCSI-1

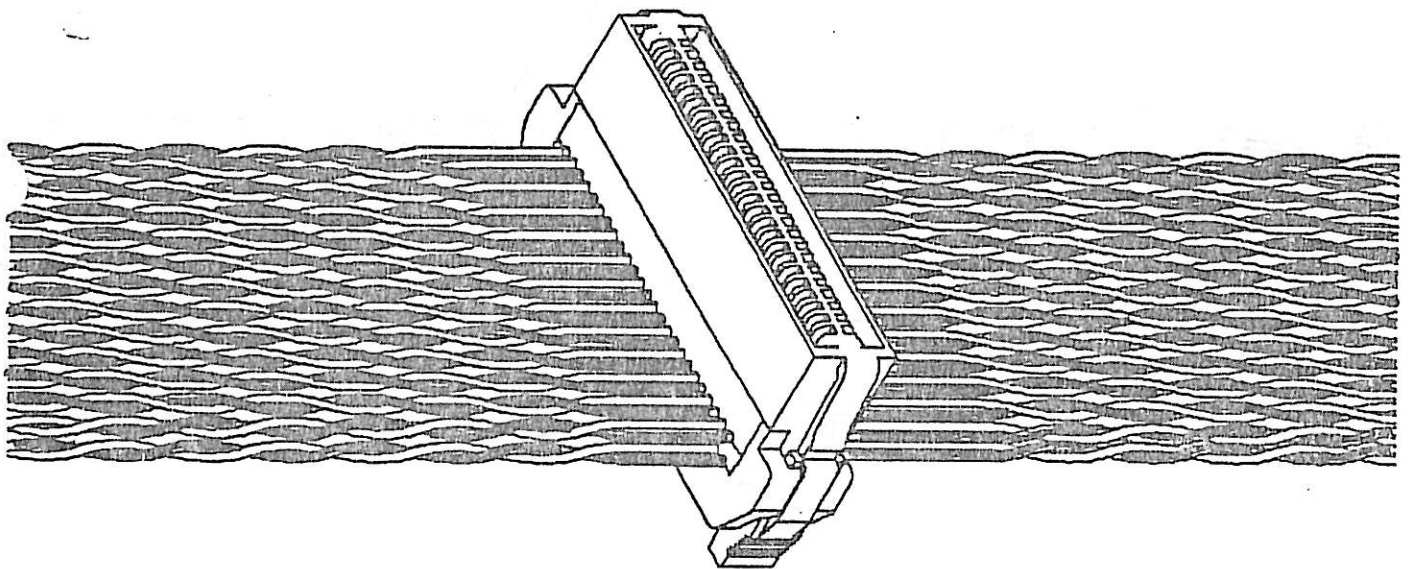

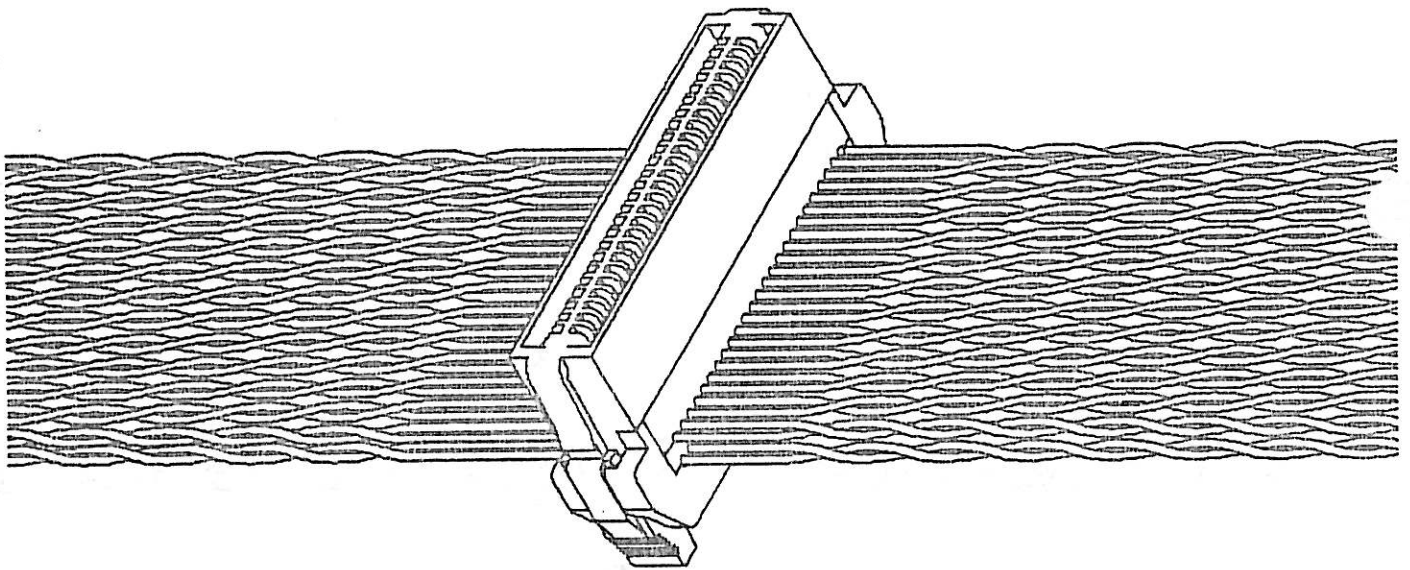

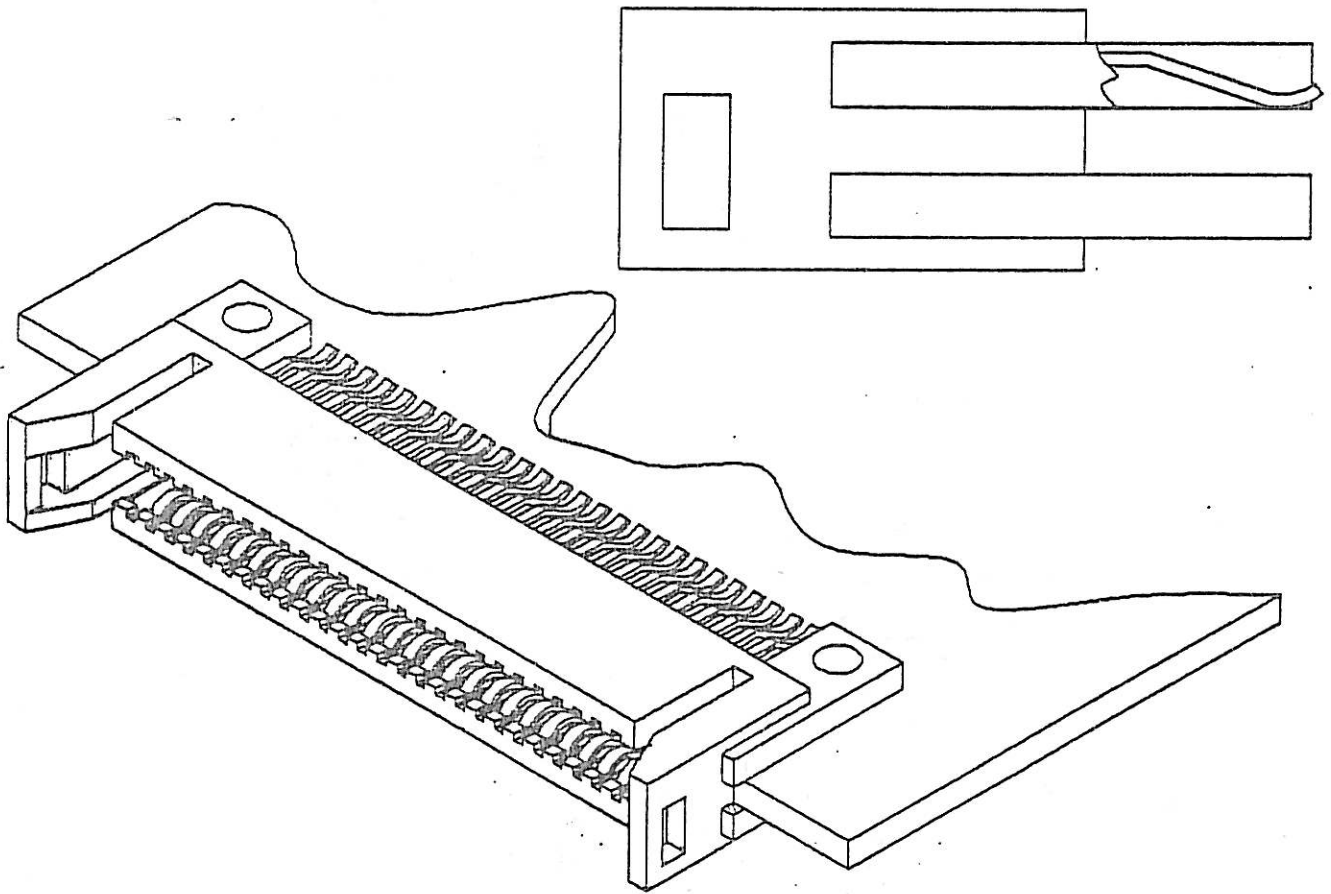

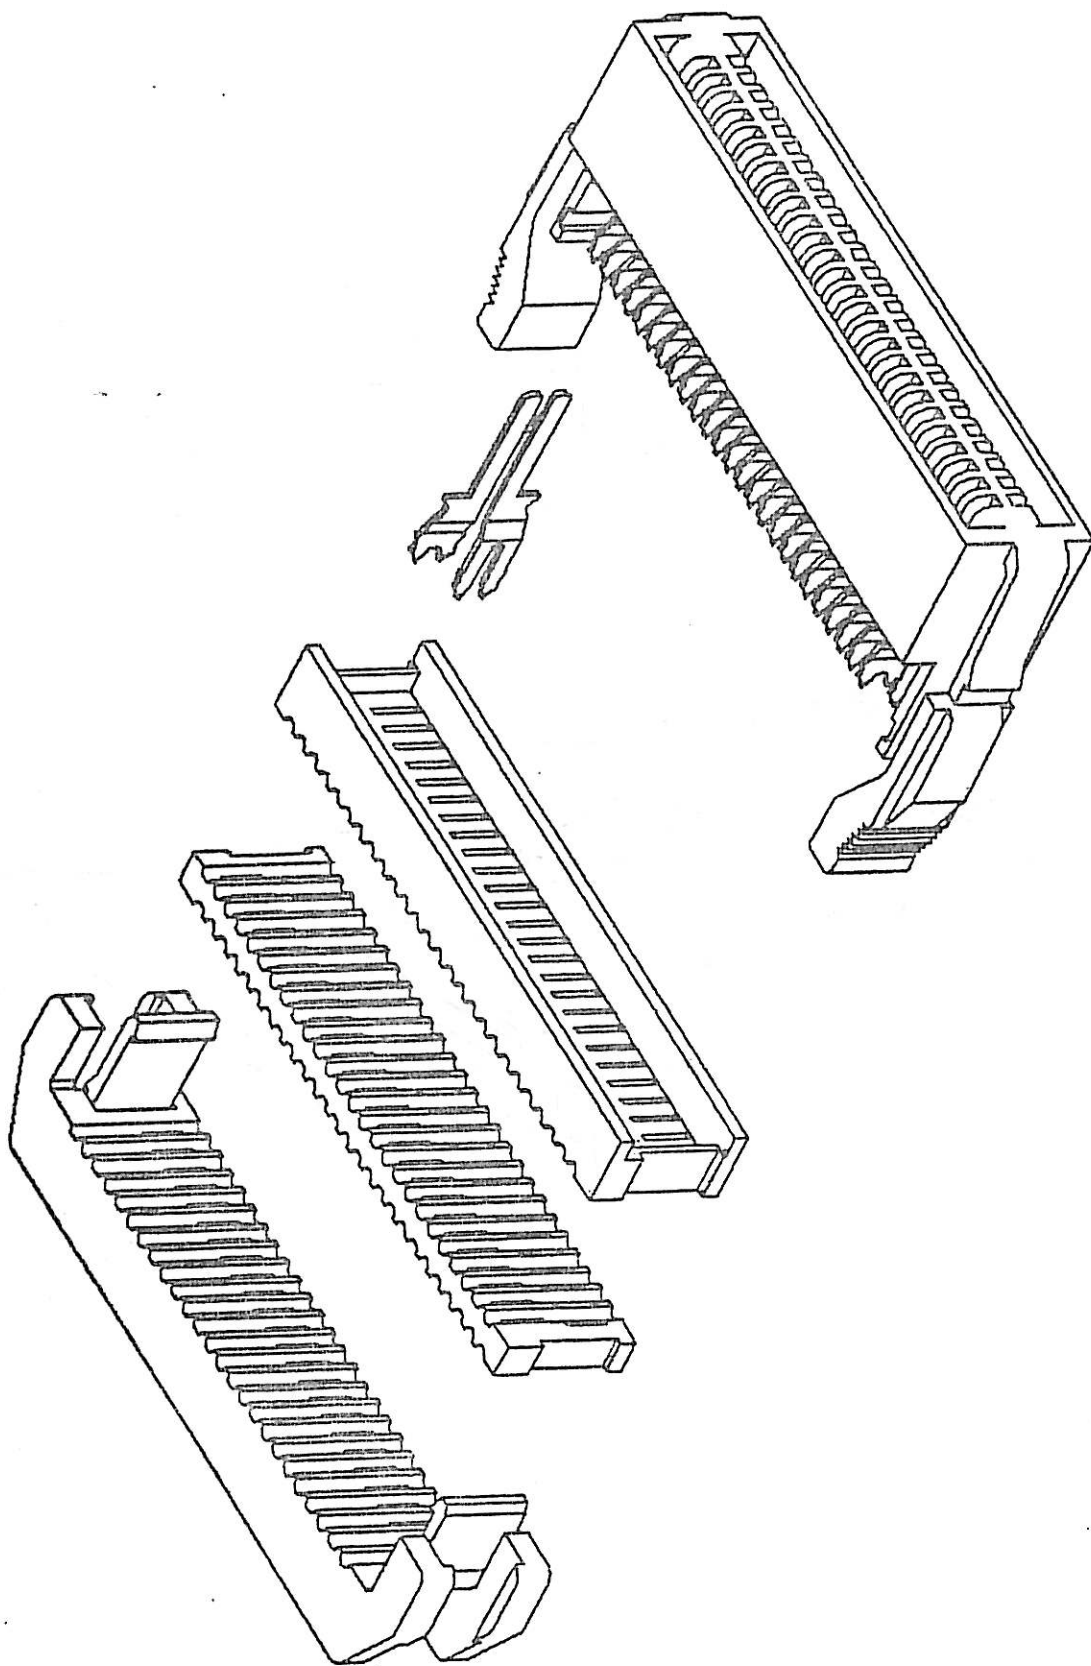

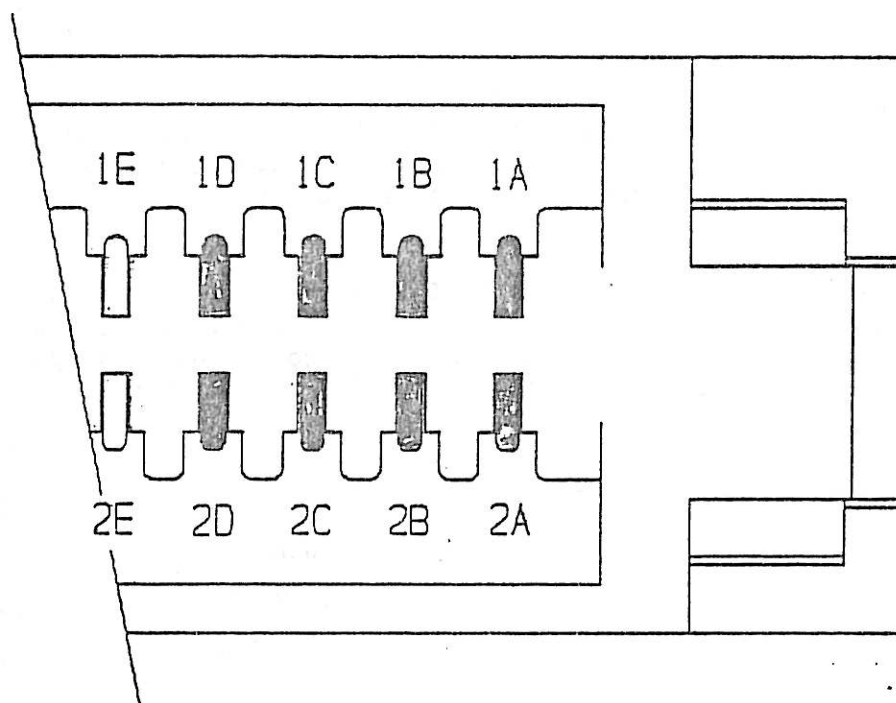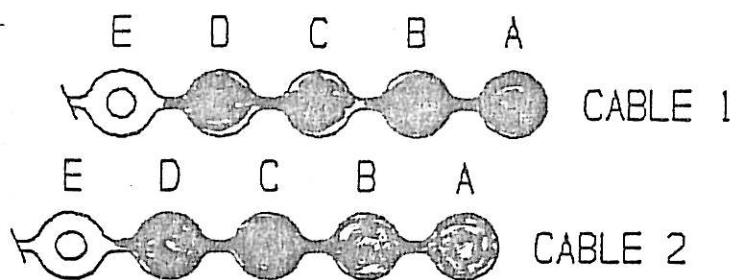

PIN-OUT for DIFFERENTIAL SIGNALS