


MDSM Impedance

Testresults IBM / ITT Cannon 96a123r0

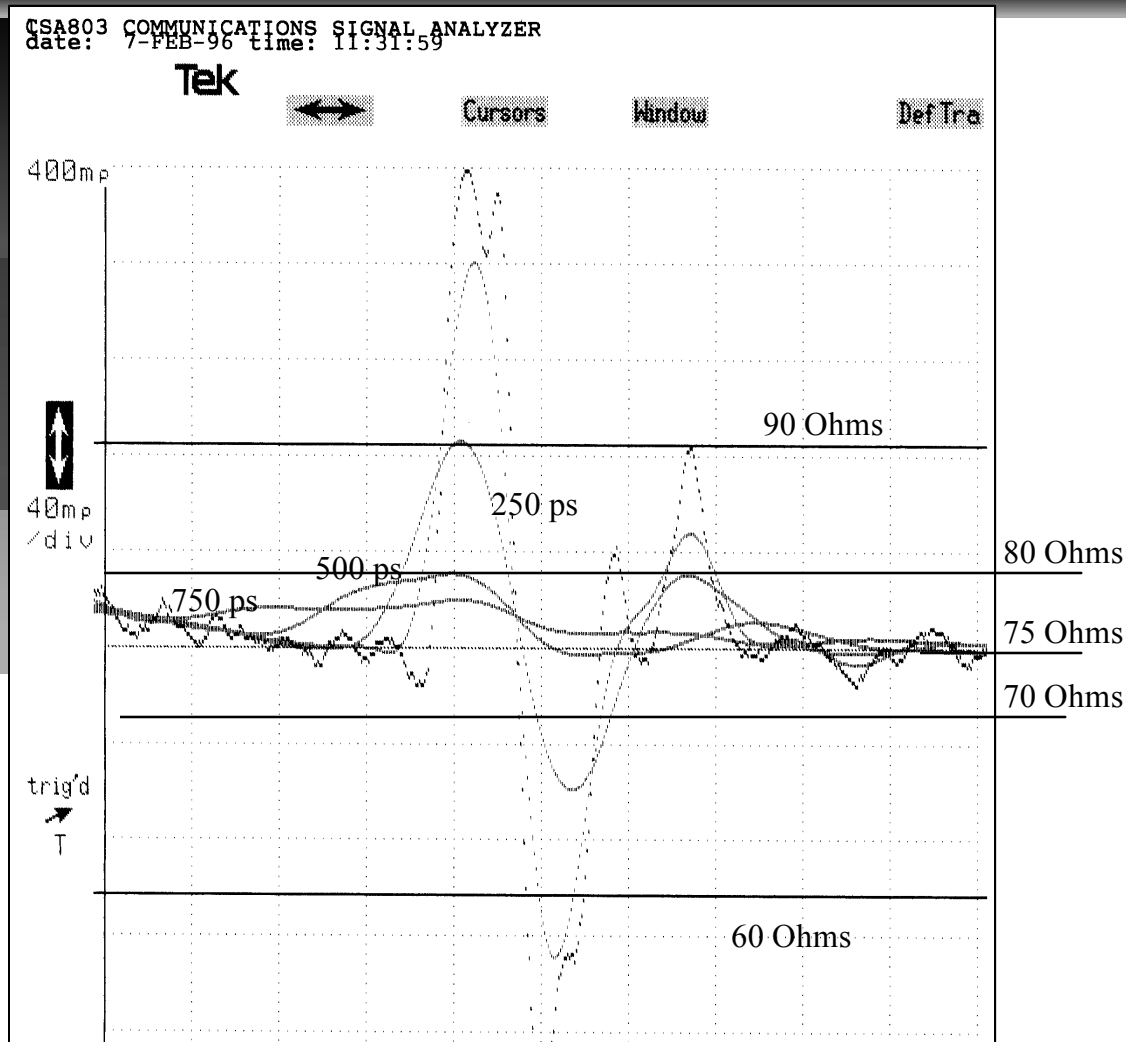

- SMD resistor direct connected to pcb tails of external device connector .
- External cable connector harnessed with 100mm Madison cable 6702 .500mm of 75 ohms cable connected between Madison cable and TDR
- Differential signal applied
- Measurement single ended
- Cable on left side
- Termination on right side .